



Datasheet

Electromagnetic flow meter AB-SUP

Datasheet

Electromagnetic flow meter for flow measurement AB-SUP-DNXX flow meter

DPF's electromagnetic flow meter does not contain any moving parts, rotating gears or turbines, or bearings. Instead, it relies on two electrodes to measure the density of the induced magnetic field that results from an electrically conductive fluid, such as water, flowing through a pipe. So there is no susceptibility to bearing wear or other mechanical wear-and-tear issues.

As for the electrodes and the liner used in electromagnetic flow meter, these components can be fabricated from a variety of materials to make the mag meter compatible with virtually various electrically conductive fluid, including aggressive acids.

The only limitation of the electromagnetic flow meter is that the measured fluid media must be electrically conductive ($> 5\mu\text{S/cm}$). Non-conductive fluids, such as oil and other petroleum-based fluids, cannot be measured with mag meter technology.

Application

- Sewage treatment
- Printing and dyeing
- Chemical industry
- Environmental protection
- Metallurgy
- Pharmaceutical
- Paper making
- Tap water supply

Features

- 0.5%F.S measuring accuracy
- RS-485 modbus communication, 4-20mA output
- It can measure the flow of fluid in the forward and reverse directions.
- Unaffected by the temperature, pressure, density of the liquid.
- There is no pressure loss.
- Readings that are unaffected by changes in density or viscosity.
- The grounding screws are available by default



Electromagnetic flowmeter


Principle

The measurement principle of magnetic flowmeters can be described as follows: when the liquid goes through the pipe at the flow rate of v with a diameter D , within which a magnetic flux density of B is created by an exciting coil, the following electromotive E is generated in proportion to flow speed v :

$$E = K \times B \times V \times D$$

Where:

- E —Induced electromotive force
- K —Meter constant
- B —Magnetic induction density
- V —Average flow speed in cross-section of measuring tube
- D —Inner diameter of measuring tube

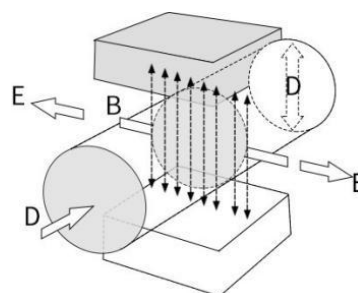


The induced voltage signal is detected by two electrodes and transmitted to the converter via a cable. After a series of analog and digital signal processing, the accumulated flow and instant flow are displayed on the display of the converter.

Accuracy

Reference condition

- (1) Medium: water;
- (2) Measuring medium temperature: 20°C;
- (3) Ambient temperature: 20°C;
- (4) Pressure: 0.1MPa;
- (5) Recommended installation conditions: straight section >10 DN before the inlet, straight section >5 DN after the outlet

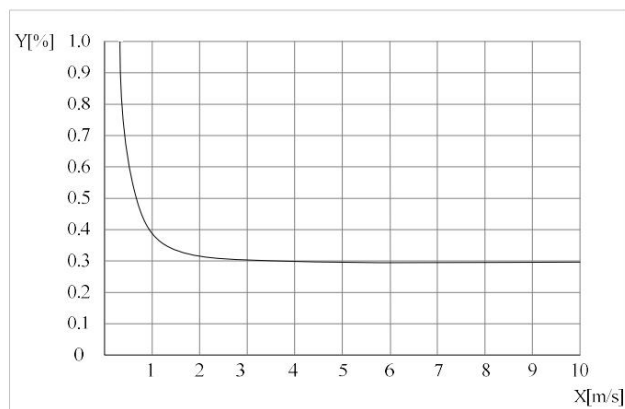


- ① X [m/s]: Flow rate
- ② Y [%]: Actual measured value deviation

Parameter

Type

Remote type


- ① Remote type flowmeter signal converter
- ② Remote type electromagnetic flowmeter sensor
- ③ Signal cable
- ④ User manual

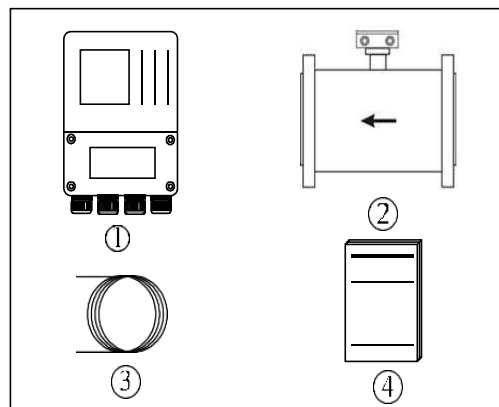

Compact type

Compact type

- ① Compact type electromagnetic flowmeter
- ② User manual

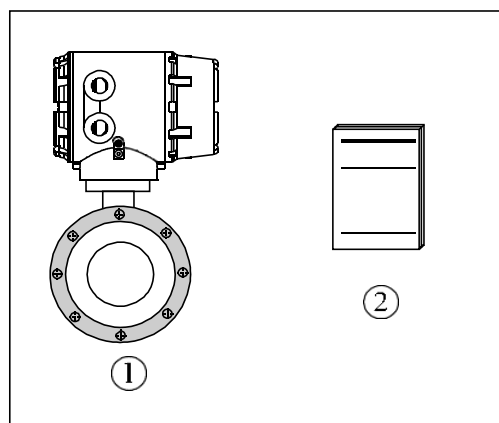

Parameter

Power supply

| | |
|-----------------------|---------------------------------|
| Power supply | 85-245 VAC, 50/60 Hz, 22-26 VDC |
| Power consumption | Max 15W |
| Insulation resistance | $\geq 20\text{M}\Omega$ |
| Signal cable | Apply only for remote type |

Output

Current output

| | | |
|------------------|---|---------|
| Function | Measurement of volume or mass flow (if the density is constant) | |
| Setting | Scope | 4-20 mA |
| | Max | 20 mA |
| | Min | 4 mA |
| Internal voltage | 24 VDC | |
| Load | $\leq 750\Omega$ | |

Pulse and frequency output

| | | |
|--------------|-----------------------------------|--|
| Function | Set up pulse and frequency output | |
| Pulse output | Basis | Output pulse width: 10-200 ms Duty cycle: 50% (Pulse frequency $\geq 5\text{Hz}$) $F_{\text{max}} \leq 5000 \text{ cp/s}$ |
| | Settings | 0.001L ~ 1 m ³ |
| | Max | $F_{\text{max}} \leq 5000\text{Hz}$ |
| Frequency | Setting | 0-5000Hz |
| | Passive | $U_{\text{External}} \leq 36\text{VDC}$ |
| Active | | $U_{\text{internal}} \leq 24\text{VDC}$ |
| | | $I \leq 4.52\text{mA}$ |

Status switch output

| | |
|----------|---|
| Function | Can be used as alarm status output |
| Passive | $U_{\text{Outer}} \leq 36\text{VDC}$ |
| Active | Active output voltage $U_{\text{internal}} \leq 24\text{VDC}$ |
| | Active output current $I \leq 4.52\text{mA}$ |

Communications

| | |
|-----------------------|---|
| Serial communications | RS-485, HART |
| Output | Current (4-20 mA), pulse, frequency, state switch |
| Function | Empty pipe recognition, electrode contamination |

Measurement Accuracy

| | |
|---------------------|--|
| Max measuring error | Measuring accuracy $\pm 0.5\%$ F.S. (Flow speed $> 1\text{m/s}$) |
| | Measuring accuracy $\pm 0.5\%$ F.S. $\pm 2\text{mm/s}$ (Flow speed $< 1\text{m/s}$) |
| Repetitiveness | 0.16% |

| Operating Environment | |
|-------------------------|--|
| Environment temperature | -10 - 55°C for Compact Type Flowmeter -10 - 60°C for Sensor of Remote Type Flowmeter -10 - 55°C for Converter of Remote Type Flowmeter |
| Storage temperature | -40 - 65°C |
| Electric Conductivity | |
| Water | Min. 20 µS/cm (The best measurement results can be achieved, when electric conductivity is greater than 30 µS/cm) |
| Other medium | Min. 5 µS/cm (The best measurement results can be achieved, when electric conductivity is greater than 30 µS/cm) |
| Materials | |
| Sensor housing | Carbon steel, stainless steel 304, stainless steel 316L |
| Converter | Standard painted die cast aluminum |
| Cable gland material | M20*1,5. Polyamide. |
| Cable material | Polyurethane |
| Display User Interface | |
| Graphic display | Monochrome LCD, white backlight; Size: 128*64 pixels |
| Display function | 2 measurement value pictures (measurements, condition, etc) |
| Language | Chinese/ English/Spanish |
| Unit | Units can be selected via the configuration menu |
| Menu navigation | 4 mechanical buttons (Compact Type) or 4 touch buttons (Remote Type) |
| Measuring System | |
| Measuring principle | Faraday's law of electromagnetic induction |
| Function | Instant flow rate, flow velocity, mass flow rate (if the density is constant), flow totalizer function. |
| Module configuration | Measurement system consists of signal converter and measuring sensor |
| Converter | |
| Compact Type | IP65 |
| Remote Type | IP65 for transmitter (IP65/IP68 for sensor) |
| Measurement sensor | |
| Nominal Diameter | DN15-DN1200 |
| Flange | In line with GB/T9119-2000, JB/81-2015 standards carbon steel (Optional stainless steel flanges), other standard flange can be customized (according to DIN:EN 1092-1, ASME: ANSI150 etc.) |
| Pressure rating | DN15 - DN250, PN ≤1.6MPa DN300 - DN1000, PN ≤1.0MPa DN1200, PN ≤0.6MPa Higher pressure can be customized |
| Lining Material | Neoprene (CR), Polyurethane (PU), PTFE (F4), PFEP (F46), PFA |

| Electrode Material | 316L Stainless Steel, Hastelloy C, Hastelloy B, Ti, Ta, Pt | |
|--------------------|---|---------------------------|
| Parameter | Remote type | Compact type |
| Ingress protection | IP65 for converter, IP68 for sensor | IP65 |
| Medium temperature | Neoprene: -10...+60°C | Neoprene: -10...+60°C |
| | Polyurethane: -10...+60°C | Polyurethane: -10...+60°C |
| | PTFE/FEP: -10...+120°C | PTFE/FEP: -10...+120°C |
| | PFA: -10...+180°C | PFA: -10...+120°C |
| Buried depth | Not deeper than 5 meters (only for remote type sensors with IP68 protection) | |
| Immersion depth | Not deeper than 3 meters (only for remote type sensors with IP68 protection) | |
| Sensor cable | Suitable only for remote type instruments. The standard cable length is 10 m; flowmeters can be equipped with a cable of optional length up to 100 m. | |

Parameter

Electrode selection

| Material | Corrosion Resistance |
|---|---|
| Molybdenum-containing stainless steel (0Cr18N12Mo2Ti) | <p><u>Applicable:</u> domestic water, industrial water, sewage, weak acid-base salt solutions, normal temperature concentrated nitric acid</p> <p><u>Not applicable:</u> hydrofluoric acid, hydrochloric acid, chlorine, bromine, iodine and other media.</p> |
| Hastelloy B | <p><u>Applicable:</u> non-oxidizing acids, such as hydrochloric acid and hydrofluoric acid of certain concentration, alkaline solutions with a concentration of no less than 70% sodium hydroxide.</p> <p><u>Not applicable:</u> nitric acid and other oxidizing acids.</p> |
| Hastelloy C | <p><u>Applicable:</u> oxidizing acids, such as nitric acid, mixed acid, or sulfuric acid mixed corrosive media, corrosive environments with oxidizing salts or other oxidizing agents such as hypochlorite solution above room temperature, seawater.</p> <p><u>Not applicable:</u> reducing acids such as hydrochloric acid and chlorides.</p> |
| Ti | <p><u>Applicable:</u> chloride, hypochlorite, seawater, oxidizing acid.</p> <p><u>Not applicable:</u> reducing acids such as hydrochloric acid, sulfuric acid, etc.</p> |
| Ta | <p><u>Applicable:</u> most acids, such as concentrated hydrochloric acid, nitric acid and sulfuric acid, including hydrochloric acid with boiling point, nitric acid and sulfuric acid below 175°C.</p> <p><u>Not applicable:</u> alkalis, hydrofluoric acid, sulfur trioxide.</p> |
| Pt | <u>Applicable:</u> various acids (excluding aqua regia), alkalis and salts. |


Notes: Due to the wide variety of media, and its corrosiveness is affected by temperature, concentration, flow rate and other complex factors and changes, so this table is only for reference, the user should make their own choice according to the actual situation. For general media, you can consult the relevant anti-corrosion manual. For mixed acid and other components of complex media, the proposed material should be done to choose the corrosion test

Lining Selection


| Lining material | Symbol | Properties | Max. operating temperature | Applicable medium | Nominal diameter |
|-----------------|--------|--|----------------------------|---|------------------|
| Neoprene | CR | Average abrasiveness, good for acids, alkalis, and salts solutions. | <60°C | Domestic water, sea water, industrial water | ≥DN50 |
| Polyurethane | PU | Has very good antiabrasive quality; not good for acids, alkali solutions | <60°C | Slurry such as mine slurry, pulp and paper | ≤DN600 |

| | | | | | |
|------|-----|--|---|--|-----------|
| PTFE | F4 | Stable chemical property, proof against the corrosion of boiling hydrochloric acid, sulphuric acid, nitric acid and aqua regia, concentrated alkalis | <120°C | Strong corrosive acids, alkali solution | DN15-1200 |
| FEP | F46 | Same chemical properties as F4, but with better tensile strength and pressure resistance. | <120°C | Corrosive acids, alkali, and salts solutions | DN15-1200 |
| PFA | PFA | Same chemical properties as F46, but with better tensile strength and pressure resistance. | <120°C (Compact) <180°C (Remote) | Corrosive acids, alkali, and salts solutions | ≤DN500 |

Dimension and Pressure

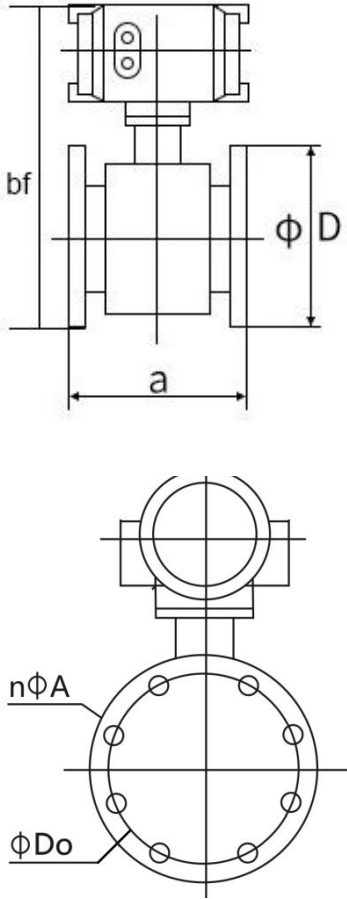
|  | DN | a | bf | D | Do | n*A | Pressure resistance |
|--|------|------|------|------|-------|-------|---------------------|
| | 15 | 200 | 326 | 95 | 65 | 4*14 | 1.6 MPa |
| | 20 | 200 | 326 | 105 | 75 | 4*14 | |
| | 25 | 200 | 316 | 115 | 85 | 4*14 | |
| | 32 | 200 | 331 | 135 | 100 | 4*18 | |
| | 40 | 200 | 339 | 145 | 110 | 4*18 | |
| | 50 | 200 | 358 | 160 | 125 | 4*18 | |
| | 65 | 200 | 370 | 180 | 145 | 4*18 | |
| | 80 | 200 | 389 | 195 | 160 | 8*18 | |
| | 100 | 250 | 410 | 215 | 180 | 8*18 | |
| | 125 | 250 | 440 | 245 | 210 | 8*18 | |
| | 150 | 300 | 469 | 280 | 240 | 8*23 | |
| | 200 | 350 | 522 | 335 | 295 | 12*23 | |
| | 250 | 450 | 824 | 405 | 355 | 12*25 | 1 MPa |
| | 300 | 500 | 624 | 440 | 400 | 12*23 | |
| | 350 | 550 | 1029 | 500 | 460 | 16*23 | |
| | 400 | 600 | 737 | 565 | 515 | 16*25 | |
| | 450 | 600 | 786 | 615 | 565 | 20*25 | |
| | 500 | 600 | 839 | 670 | 620 | 20*25 | |
| | 600 | 600 | 944 | 780 | 725 | 20*30 | |
| | 700 | 700 | 1052 | 895 | 840 | 24*30 | |
| | 800 | 800 | 1164 | 1015 | 950 | 24*33 | |
| | 900 | 900 | 1264 | 1115 | 1050 | 28*33 | |
| | 1000 | 1000 | 1374 | 1230 | 1160 | 28*36 | 0.6 MPa |
| 1200 | 1200 | 1589 | 1405 | 1340 | 32*33 | | |

Compact Type

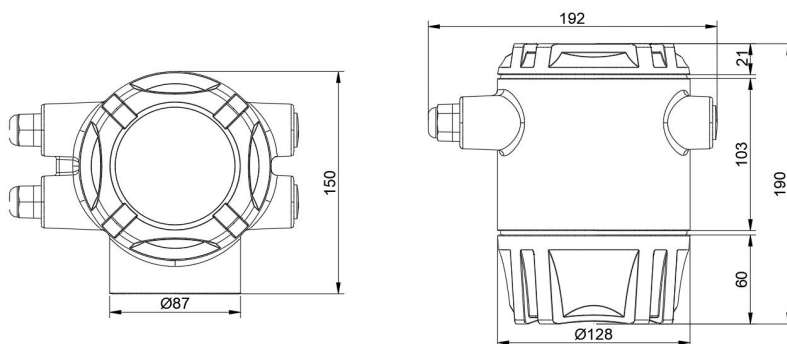

Unit:mm

Remote Type

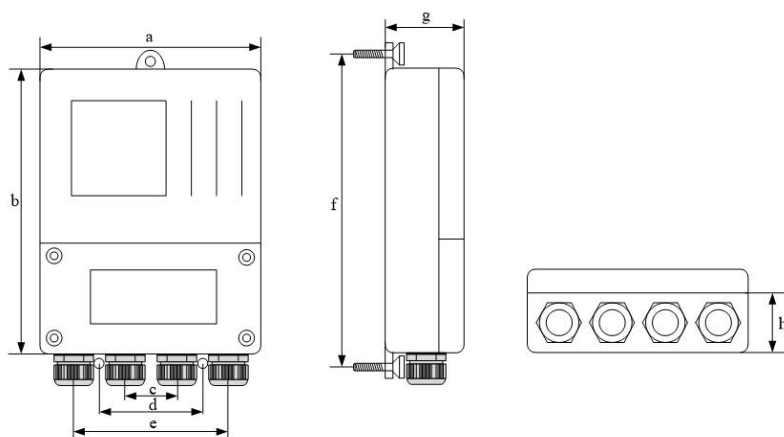

Unit:mm

| Dimension[mm] | | | | | | | | Weight[kg] |
|---------------|-------|----|----|-----|-------|------|------|------------|
| a | b | c | d | e | f | g | h | |
| 164 | 214.5 | 34 | 70 | 102 | 233.5 | 69.7 | 45.7 | 0.6 |

| Flow Range | | | |
|--------------------------|---|------------|---|
| Nominal Diameter (mm) | Flow range (m ³ /h) | | |
| | The optional lower range value can be selected from the following array | Standard | The optional upper range value can be selected from the following array |
| 15 | 0.0636-0.6 | 0.8-3.0 | 4.0-7.632 |
| 20 | 0.131-1.0 | 1.2-5.0 | 6.0-13.6 |
| 25 | 0.176-1.6 | 2.0-8.0 | 10-21 |
| 32 | 0.2895-2.5 | 3.0-12 | 16-35 |
| 40 | 0.4524-4.0 | 5.0-20 | 25-45 |
| 50 | 0.707-6.0 | 8.0-40 | 50-85 |
| 65 | 1.195-10 | 12-60 | 80-143 |
| 80 | 1.81-16 | 20-120 | 160-217 |
| 100 | 2.83-25 | 30-160 | 200-339 |
| 125 | 4.42-40 | 50-250 | 300-530 |
| 150 | 6.36-60 | 80-400 | 500-763 |
| 200 | 11.3-100 | 120-600 | 800-1357 |
| 250 | 17.7-160 | 200-800 | 1000-2120 |
| 300 | 25.45-250 | 300-1200 | 1600-3054 |
| 350 | 34.6-300 | 400-1600 | 2000-4157 |
| 400 | 45.2-400 | 500-2000 | 2500-5429 |
| 450 | 57.3-500 | 600-2500 | 3000-6871 |
| 500 | 70.7-600 | 800-3000 | 4000-8482 |
| 600 | 102-800 | 1000-4000 | 5000-12216 |
| 700 | 139-1200 | 1600-5000 | 6000-16620 |
| 800 | 181-1600 | 2000-6000 | 8000-21720 |
| 900 | 229-1600 | 2000-8000 | 10000-27480 |
| 1000 | 283-2000 | 2500-10000 | 12000-33924 |
| 1200 | 407-2500 | 3000-12000 | 16000-48833 |

Reduction formula: (Flow)Q = (flow velocity) V × π × (DN/2)², Units: m/s and m³/h

Flow and Velocity

| Flow (m³/h) DN(mm) | Velocity (m/s) | |
|--------------------------|-------------------|-------|
| | 0.5 | 5 |
| DN15 | 0.32 | 3.2 |
| DN20 | 0.56 | 5.6 |
| DN25 | 0.88 | 8.8 |
| DN32 | 1.4 | 14 |
| DN40 | 2.3 | 23 |
| DN50 | 3.5 | 35 |
| DN65 | 6 | 60 |
| DN80 | 9 | 90 |
| DN100 | 14 | 140 |
| DN125 | 22 | 220 |
| DN150 | 32 | 320 |
| DN200 | 56 | 560 |
| DN250 | 88 | 880 |
| DN300 | 127 | 1270 |
| DN350 | 173 | 1730 |
| DN400 | 226 | 2260 |
| DN450 | 286 | 2860 |
| DN500 | 353 | 3530 |
| DN600 | 509 | 5090 |
| DN700 | 693 | 6930 |
| DN800 | 905 | 9050 |
| DN900 | 1150 | 11500 |
| DN1000 | 1410 | 14100 |
| DN1200 | 2040 | 20400 |

Parameter

★ Process connection

Note : Flanges can be customized, and the pressure need to be considerate



Clamp on (Stainless steel)



Flange (Stainless steel)






Flange (Carbon steel)

DN15 - DN250, PN \leq 1.6MPa
 DN300 - DN1000, PN \leq 1MPa
 DN1200, PN \leq 0.6MPa


★ Location

Do not install the electromagnetic flowmeter on a free-vibrating pipe without any support. Instead, a mounting base shall be used to secure the measuring tube. When the electromagnetic flowmeter is required to be installed underground, the pipes at both inlet and outlet ends shall be provided with support items, and a metal protection plate shall be installed above the flowmeter.

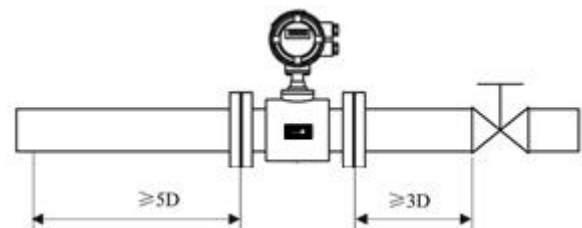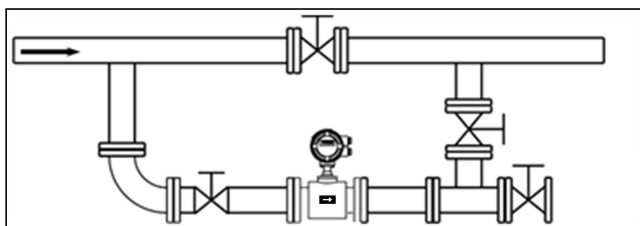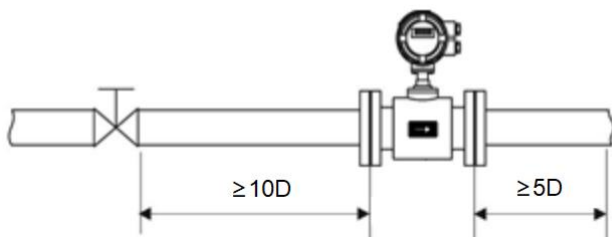


(1) No bubbles shall be observed in the pipes.

Pipes shall be designed to prevent the air bubbles in the fluids from accumulating the measurement pipe of a sensor. If a valve exists near the flowmeter, try to mount the flowmeter on the valve's upstream side for preventing a decrease of pressure inside the pipe possibly, consequently avoiding the possibility of air bubbles. ensure that no gas can be separated from the liquid.

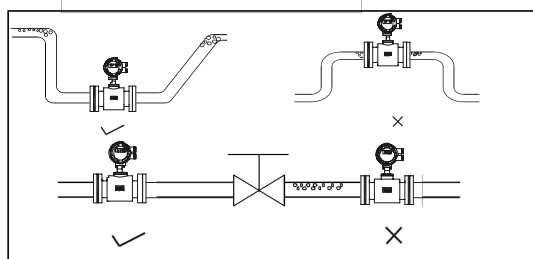

(2) Flow direction


The flowmeter can be set to automatically detect the positive and negative flow direction. The flow direction arrow on the sensor casing indicates the positive flow direction specified by the manufacturer. Generally, when installing the meter, the user shall make the flow arrow consistent with the on-site process flow.

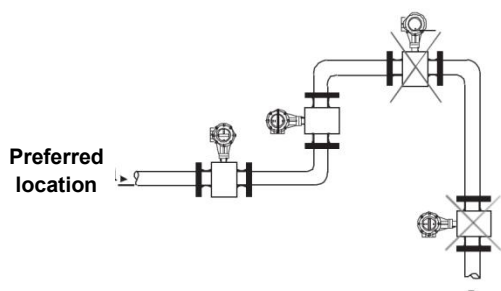


The pipe is routed to the highest point
(Bubble accumulation in the measuring tube is likely to cause produce measurement errors!)

Make sure the pipeline is always full.


(3) The electromagnetic flowmeter cannot be installed on the suction side of the pump

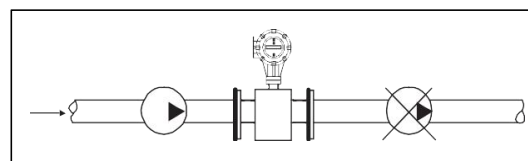


(4) For long pipelines, control valves are generally installed on the downstream of the electromagnetic flowmeter.

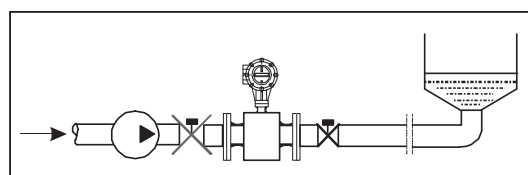

(5) For pipes with open discharges, the electromagnetic flowmeter shall be installed at the bottom section (lower part of the pipe).

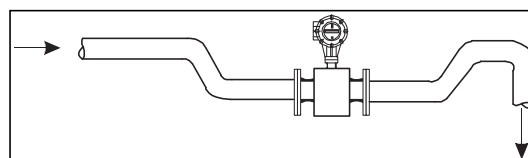

(6) For places where fall head of pipes is over 5 m, the air valve shall be installed on the downstream of the electromagnetic flowmeter

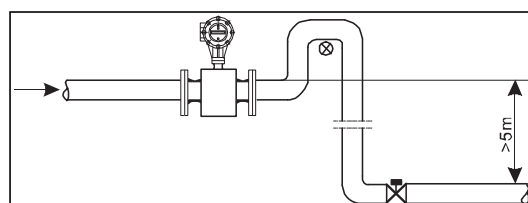

(7) Measurement error caused by incidental gas and damage of lining caused by vacuum shall be avoided


(8) Grounding

As the voltage of induced signal of electromagnetic flowmeter is small, it's more prone to be affected by noises or other electromagnetic signals. This is why the electromagnetic flowmeter needs to be grounded in many occasions. This functions to form an internal space for shielding external interference through the grounding of flowmeter casing, thereby improving measurement accuracy.

Wiring


Remote

| | |
|------------------|---|
| L, N: | 100-240VAC power supply 24VDC power supply |
| ALM1, ALM2 | Relay out |
| POUT, PCOM | Pulse/Frequency output |
| 485A, 485B: | RS-485 communication |
| IOUT, ICOM: | 4-20mA output |
| EXT1, EXT2 | Excitation signal |
| SIG1, SIG2, SGND | Electrode signal |
| DS1, DS2 | Electrode shield |

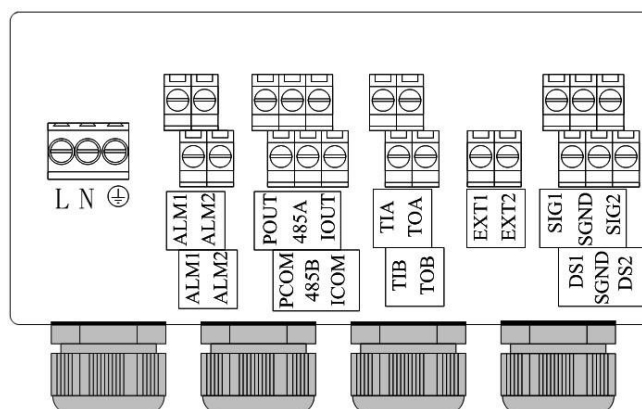

Compact type

| | |
|-------------|---|
| L, N: | 100-240VAC power supply 24VDC power supply |
| 485A, 485B: | RS-485 communication |
| IOUT, ICOM: | 4-20mA output connection |
| POUT, PCOM: | Pulse/Frequency |
| CCOM: | RS-485 communication ground Protective earth |

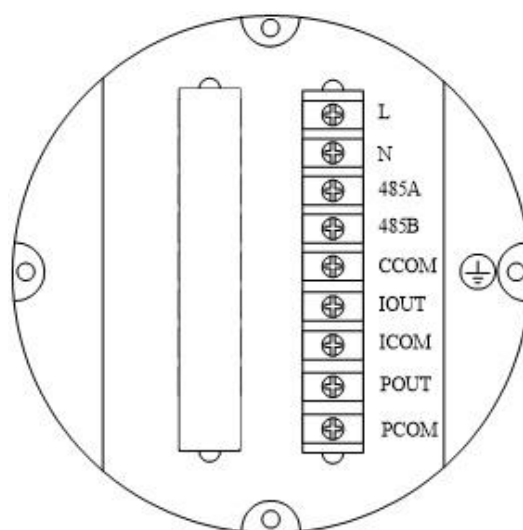

Ordering code

| AB-SUP-M1-DNxx-Jx-O1-PWM1-D1-I1-V1-P1-E1-L1-G1-B1-IP1 | | | | | | | | | | | | | | Description |
|---|------|---|---|---|----|---|---|---|---|---|---|----|---|--------------------------|
| AB-SUP | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| Type | M1 | | | | | | | | | | | | | Compact type |
| | M2 | | | | | | | | | | | | | Remote type |
| Pipe size | DNXX | | | | | | | | | | | | | DN15 - DN1200 |
| Accuracy | J5 | | | | | | | | | | | | | 0.50% |
| Transmit output | O1 | | | | | | | | | | | | | 4-20mA output |
| Frequency output | PWM1 | | | | | | | | | | | | | Frequency (pulse) output |
| Communication | | | | | D1 | | | | | | | | | RS-232 |
| | | | | | D2 | | | | | | | | | RS-485 |
| | | | | | D3 | | | | | | | | | HART |
| Installation | | | | | I1 | | | | | | | | | Thread |
| | | | | | I2 | | | | | | | | | Flange |
| | | | | | I3 | | | | | | | | | Wafer connection |
| | | | | | I4 | | | | | | | | | Clamp |
| Power supply | | | | | V1 | | | | | | | | | 24VDC |
| | | | | | V2 | | | | | | | | | 220VAC |
| Pressure rating | | | | | P1 | | | | | | | | | 0.6MPa |
| | | | | | P2 | | | | | | | | | 1.0MPa |
| | | | | | P3 | | | | | | | | | 1.6MPa |
| | | | | | P4 | | | | | | | | | 2.5MPa |
| | | | | | P5 | | | | | | | | | 4.0MPa |
| | | | | | P6 | | | | | | | | | 6.3MPa |
| | | | | | PZ | | | | | | | | | Others |
| Electrode material | | | | | E1 | | | | | | | | | Stainless steel 316L |
| | | | | | E2 | | | | | | | | | Titanium |
| | | | | | E3 | | | | | | | | | Tantalum |
| | | | | | E4 | | | | | | | | | Hastelloy B |
| | | | | | E5 | | | | | | | | | Hastelloy C |
| | | | | | E6 | | | | | | | | | Platinum |
| | | | | | E7 | | | | | | | | | Tungsten carbide |
| | | | | | E8 | | | | | | | | | Others |
| Lining material | | | | | L1 | | | | | | | | | Neoprene(CR) |
| | | | | | L2 | | | | | | | | | Polyurethane(PU) |
| | | | | | L3 | | | | | | | | | F4/PTFE |
| | | | | | L4 | | | | | | | | | F46/FEP |
| | | | | | L5 | | | | | | | | | PFA |
| | | | | | LZ | | | | | | | | | Others |
| Grounding | | | | | | | | | | | | G1 | | Grounding electrode |

| | | | |
|--------------------|-----|--|-------------------------|
| | G2 | | Grounding ring |
| | B0 | | Carbon steel |
| Body material | B1 | | Stainless steel 304 |
| | B2 | | Stainless steel 316 |
| Ingress protection | IP1 | | IP65 |
| | IP3 | | IP68 (remote type only) |